


1-Line, Uni-directional, Transient Voltage Suppressor

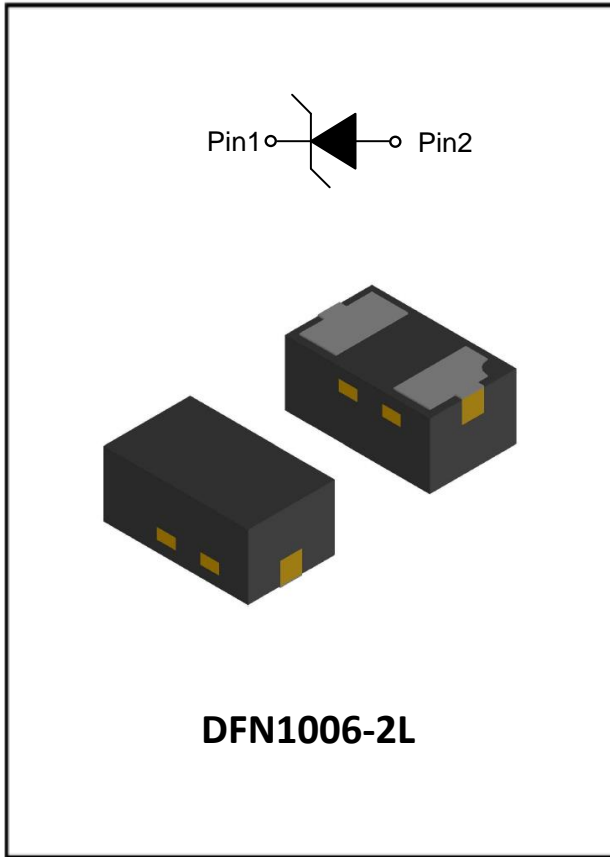

Features


- Stand-off voltage: 5V Max
- Transient protection for each line according to
 - IEC61000-4-2(ESD): $\pm 30\text{kV}$ (contact)
 - IEC61000-4-2(ESD): $\pm 30\text{kV}$ (air)
 - IEC61000-4-5(lightning): 15A (8/20 μs)
- Protects one data or power line
- Ultra low leakage: nA level
- Low clamping voltage:
- RoHS Compliant

Applications


- Cellular Handsets and Accessories
- Personal Digital Assistants
- Notebooks and Handhelds
- Portable Instrumentation
- Digital Cameras
- Peripherals
- Audio Players
- Keypads, Side Keys, LCD Displays

Mechanical Data

- Package: DFN1006-2L
- Case Material: "Green" Molding Compound
- Marking Information: See Below



■ Definitions of electrical characteristics

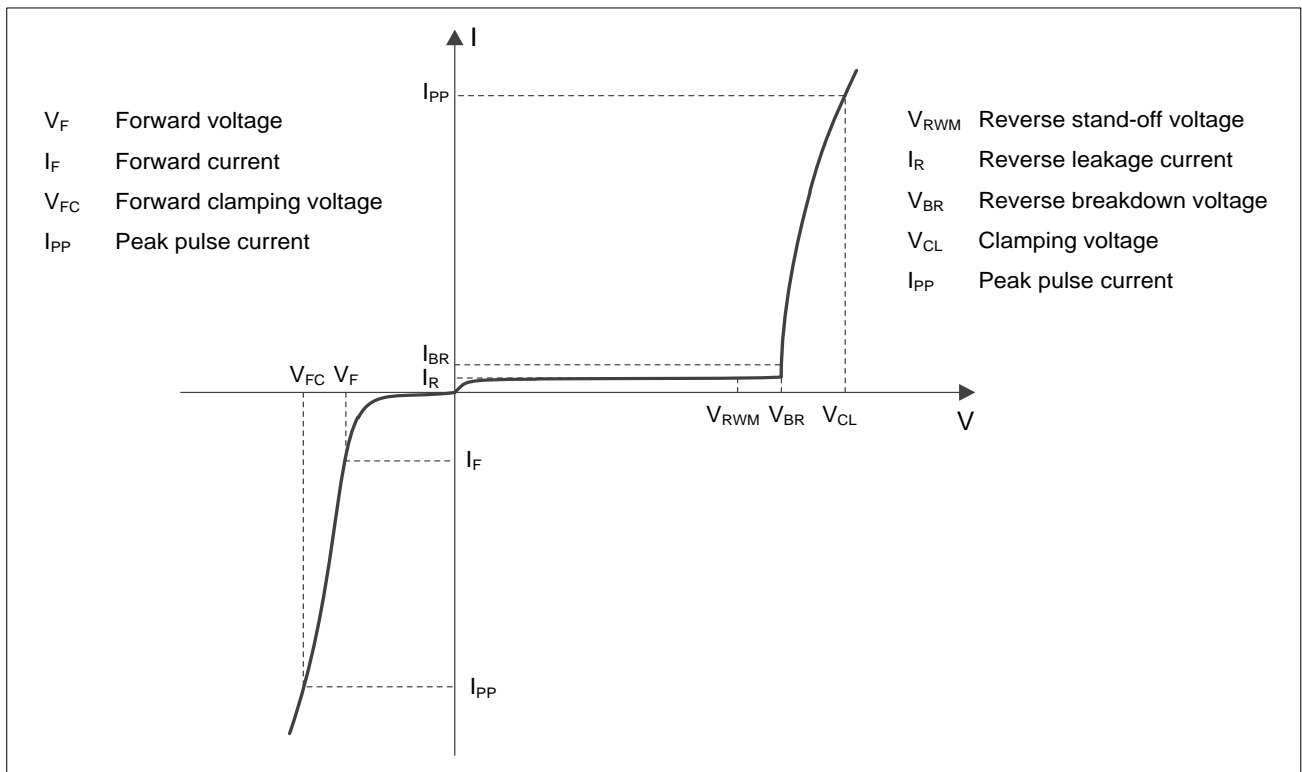



ESD5V0LA

■Maximum Ratings

| PARAMETER | SYMBOL | LIMITS | UNIT |
|---|-----------|----------|-------------|
| Peak pulse power ($t_p = 8/20\mu s$) | P_{pk} | 200 | W |
| Peak pulse current ($t_p = 8/20\mu s$) | I_{PP} | 15 | A |
| ESD according to IEC61000-4-2 air discharge | V_{ESD} | ± 30 | kV |
| ESD according to IEC61000-4-2 contact discharge | | ± 30 | |
| Junction temperature | T_J | -55~125 | $^{\circ}C$ |
| Storage temperature | T_{STG} | -55~150 | $^{\circ}C$ |

■Electrical Characteristics ($T_a=25^{\circ}C$ Unless otherwise specified)

| PARAMETER | Symbol | UNIT | Conditions | Min | Typ | Max |
|---------------------------------|-----------|------|---------------------------------|-----|-----|-----|
| Reverse maximum working voltage | V_{RWM} | V | | | | 5 |
| Reverse leakage current | I_R | nA | $V_{RWM} = 5V$ | | | 200 |
| Reverse breakdown voltage | V_{BR} | V | $I_{BR} = 1mA$ | 6 | | |
| Forward voltage | V_F | V | $I_F = 10mA$ | | 1 | |
| Clamping voltage | V_{CL} | V | $I_{PP} = 1A, t_p = 8/20\mu s$ | | | 8 |
| | | V | $I_{PP} = 15A, t_p = 8/20\mu s$ | | | 14 |
| Junction capacitance | C_J | pF | $V_R = 0V, f = 1MHz$ | | | 100 |

■Ordering Information (Example)

| PREFERRED P/N | PACKING CODE | UNIT WEIGHT(mg) | MINIMUM PACKAGE(pcs) | INNER BOX QUANTITY(pcs) | OUTER CARTON QUANTITY(pcs) | DELIVERY MODE |
|---------------|--------------|-----------------|----------------------|-------------------------|----------------------------|---------------|
| ESD5V0LA | F2 | Approximate 0.9 | 3000 | 30000 | 120000 | 7" reel |



■ Characteristics (Typical)

Fig.1 8/20μs waveform per IEC61000-4-5

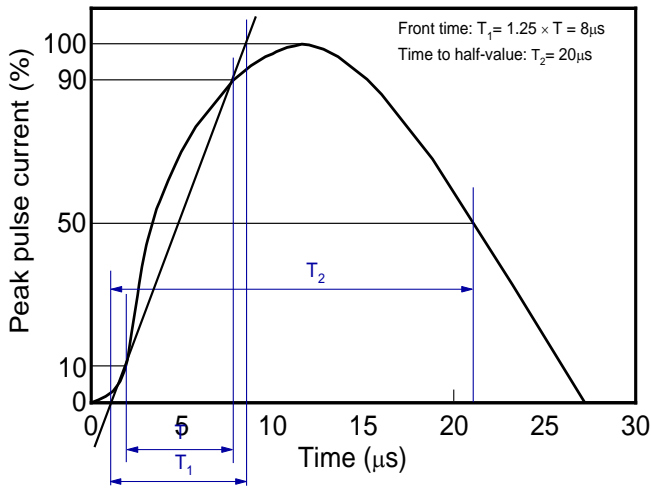


Fig.3 Clamping voltage vs. Peak pulse current

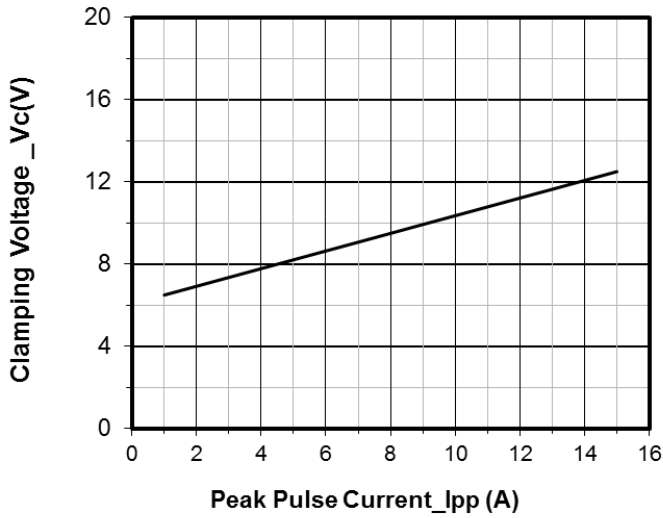


Fig.5 Non-repetitive peak pulse power vs. Pulse time

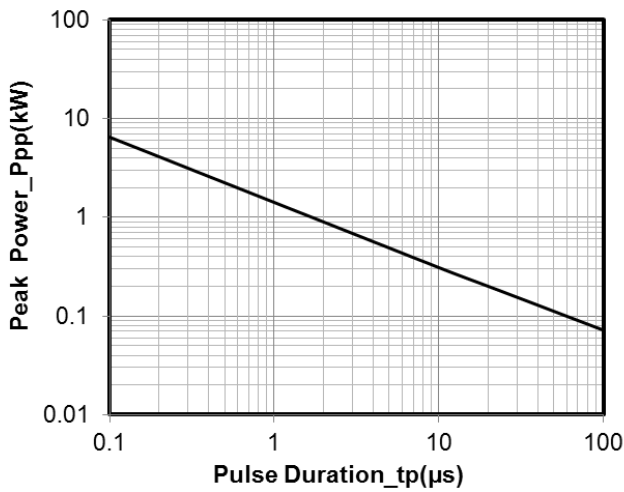


Fig.2 Contact discharge current waveform per IEC61000-4-2

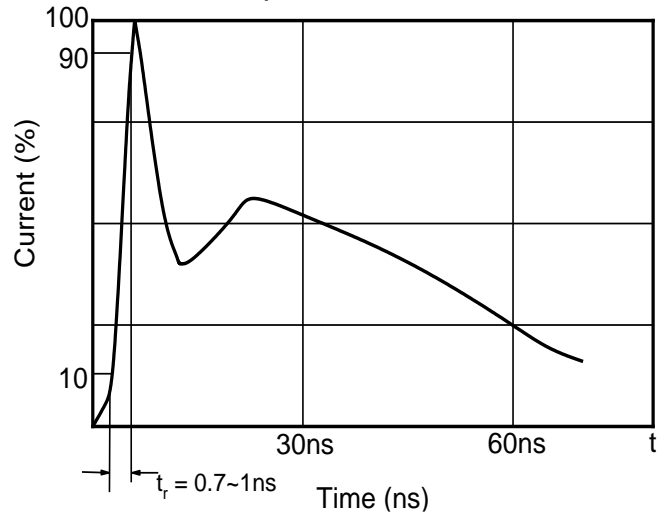


Fig.4 Capacitance vs. Reverse voltage

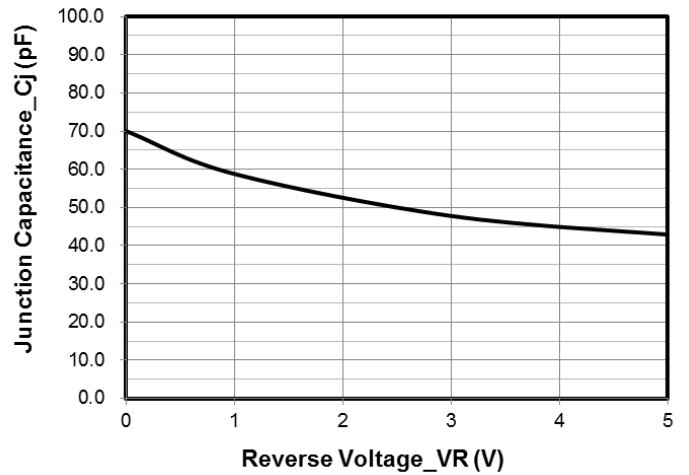


Fig.6 Power derating vs. Ambient temperature



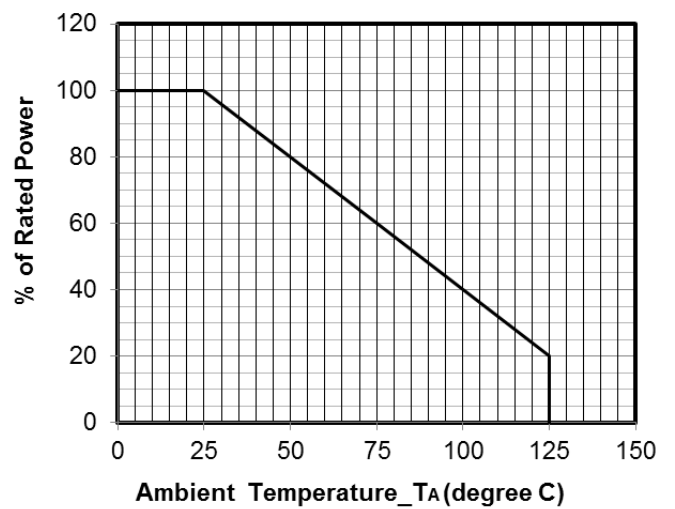


Fig.7 ESD Clamping Voltage
8kv Contact per IEC61000-4-2

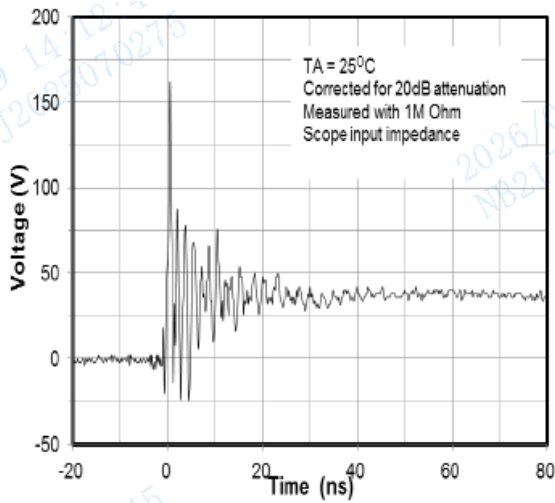


■ Outline Dimensions

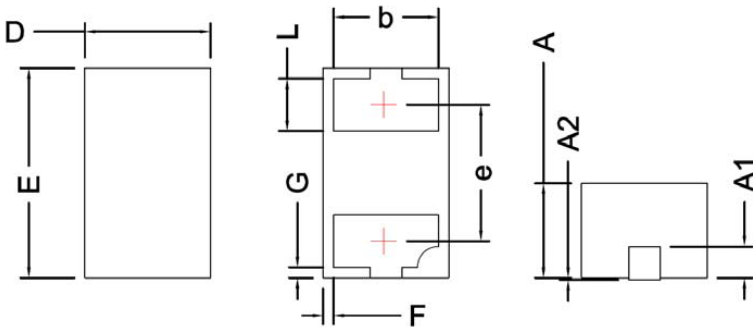

| SYMBOL | MILLIMETER | | |
|--------|------------|------|------|
| | MIN | NOM | MAX |
| D | 0.50 | 0.60 | 0.70 |
| E | 0.90 | 1.00 | 1.10 |
| A | 0.35 | 0.45 | 0.55 |
| A1 | 0.15 BSC | | |
| A2 | | | 0.10 |
| F | 0.005 | | |
| G | 0.005 | | |
| L | 0.15 | 0.25 | 0.35 |
| b | 0.41 | 0.50 | 0.59 |
| e | 0.65 BSC | | |

■ Recommended PCB Layout



Unit:mm

Notes:

This recommended land pattern is for reference purposes only. Please consult your manufacturing group to ensure your PCB design guidelines are met



ESD5V0LA

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.