



## Surface Mount Zener Diodes

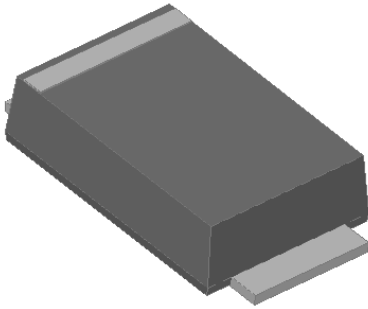

### Features

- Low profile package
- Ideal for automated placement
- Glass passivated chip junction
- High forward surge capability
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C
- Part no. with suffix "Q" means AEC-Q101 qualified

### Mechanical Data

- **Package:** SMAF  
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, halogen-free
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** Cathode line denotes the cathode end

### ■Maximum Ratings (T<sub>a</sub>=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	MAX
DC power dissipation at T <sub>L</sub> = 75 °C	P <sub>D</sub>	W	3.0
Maximum instantaneous forward voltage@ I <sub>F</sub> =200mA	V <sub>F</sub>	V	1.5
Maximum junction temperature	T <sub>J</sub>	°C	-55 to +150
Storage temperature range	T <sub>stg</sub>	°C	-55 to +150

### ■Thermal Characteristics (T<sub>a</sub>=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	Conditions	VALUE
Thermal resistance(Typical)	R <sub>θJ-L</sub> <sup>(1)</sup>	°C/W	junction to lead	25
	R <sub>θJ-A</sub> <sup>(1)</sup>	°C/W	junction to ambient	130

Note

(1) Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.2" x 0.2" (5 mm x 5 mm) copper pad areas



# SMAF3Z6.8AQ THRU SMAF3Z200AQ

## ■Electrical Characteristics (T<sub>a</sub>=25°C Unless otherwise specified)

Part Number	Nominal Zener voltage			Test current	Maximum dynamic impedance resistance			Maximum reverse leakage current		Maximum DC Zener Current
	Min V <sub>Z</sub> <sup>(1)</sup> at I <sub>ZT</sub>	Typ. V <sub>Z</sub> <sup>(1)</sup> at I <sub>ZT</sub>	Max V <sub>Z</sub> <sup>(1)</sup> at I <sub>ZT</sub>	I <sub>ZT</sub>	Z <sub>ZT</sub> at I <sub>ZT</sub>	Z <sub>ZK</sub> at I <sub>ZK</sub>	I <sub>ZK</sub>	I <sub>R</sub>	Test voltage V <sub>R</sub>	I <sub>ZM</sub>
	V	V	V	mA	Ω	Ω	mA	μA	V	mA
SMAF3Z6.8AQ	6.46	6.8	7.14	55.1	2.5	200	1.00	5	5.2	440
SMAF3Z7.5AQ	7.13	7.5	7.88	50.0	3.0	400	0.50	5	6.0	400
SMAF3Z8.2AQ	7.79	8.2	8.61	45.7	3.5	400	0.50	5	6.5	364
SMAF3Z9.1AQ	8.65	9.1	9.56	41.2	4.0	500	0.50	5	7.0	328
SMAF3Z10AQ	9.50	10.0	10.50	37.5	4.5	500	0.25	5	8.0	300
SMAF3Z11AQ	10.45	11.0	11.55	34.1	5.5	550	0.25	1	8.4	272
SMAF3Z12AQ	11.40	12.0	12.60	31.2	6.5	550	0.25	1	9.1	250
SMAF3Z13AQ	12.35	13.0	13.65	28.8	7.0	550	0.25	1	9.9	230
SMAF3Z15AQ	14.25	15.0	15.75	25.0	9.0	600	0.25	1	11.4	200
SMAF3Z16AQ	15.20	16.0	16.80	23.4	10.0	600	0.25	1	12.2	186
SMAF3Z18AQ	17.10	18.0	18.90	20.8	12.0	650	0.25	1	13.7	166
SMAF3Z20AQ	19.00	20.0	21.00	18.7	14.0	650	0.25	1	15.2	150
SMAF3Z22AQ	20.90	22.0	23.10	17.0	17.5	650	0.25	1	16.7	136
SMAF3Z24AQ	22.80	24.0	25.20	15.6	19.0	700	0.25	1	18.2	124
SMAF3Z27AQ	25.65	27.0	28.35	13.9	23.0	700	0.25	1	20.6	110
SMAF3Z30AQ	28.50	30.0	31.50	12.5	28.0	750	0.25	1	22.8	100
SMAF3Z33AQ	31.35	33.0	34.65	11.4	33.0	800	0.25	1	25.1	90
SMAF3Z36AQ	34.20	36.0	37.80	10.4	38.0	850	0.25	1	27.4	82
SMAF3Z39AQ	37.05	39.0	40.95	9.6	45.0	900	0.25	1	29.7	76
SMAF3Z43AQ	40.85	43.0	45.15	8.7	53.0	950	0.25	1	32.7	68
SMAF3Z47AQ	44.65	47.0	49.35	8.0	67.0	1000	0.25	1	35.8	62
SMAF3Z51AQ	48.45	51.0	53.55	7.3	70.0	1100	0.25	1	38.8	58
SMAF3Z56AQ	53.20	56.0	58.80	6.7	86.0	1300	0.25	1	42.6	52
SMAF3Z62AQ	58.90	62.0	65.10	6.0	100.0	1500	0.25	1	47.1	48
SMAF3Z68AQ	64.60	68.0	71.40	5.5	120.0	1700	0.25	1	51.7	44
SMAF3Z75AQ	71.25	75.0	78.75	5.0	140.0	2000	0.25	1	56.0	40
SMAF3Z82AQ	77.90	82.0	86.10	4.6	160.0	2500	0.25	1	62.2	36
SMAF3Z91AQ	86.45	91.0	95.55	4.1	200.0	3000	0.25	1	69.2	32
SMAF3Z100AQ	95.00	100.0	105.00	3.7	250.0	3100	0.25	1	76.0	30
SMAF3Z110AQ	104.50	110.0	115.50	3.4	300.0	4000	0.25	1	83.6	26
SMAF3Z120AQ	114.00	120.0	126.00	3.1	380.0	4500	0.25	1	91.2	24
SMAF3Z130AQ	123.50	130.0	136.50	2.9	450.0	5000	0.25	1	98.8	22
SMAF3Z150AQ	142.50	150.0	157.50	2.5	600.0	6000	0.25	1	114.0	20
SMAF3Z160AQ	152.00	160.0	168.00	2.3	700.0	6500	0.25	1	121.6	18
SMAF3Z180AQ	171.00	180.0	189.00	2.1	900.0	7000	0.25	1	136.8	16
SMAF3Z200AQ	190.00	200.0	210.00	1.9	1200.0	8000	0.25	1	152.0	14

Notes:

(1) Nominal Zener voltage Range: 95% Typ.V<sub>Z</sub> (1)at I<sub>ZT</sub>----105% Typ.V<sub>Z</sub> (1)at I<sub>ZT</sub>



# SMAF3Z6.8AQ THRU SMAF3Z200AQ

## ■ Characteristics (Typical)

Fig.1:Power Temperature Derating Curve

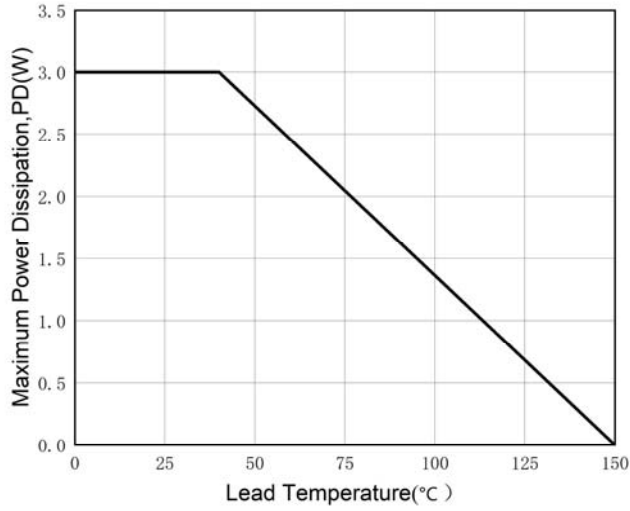


Fig.2:Typical Zener Breakdown Characteristics


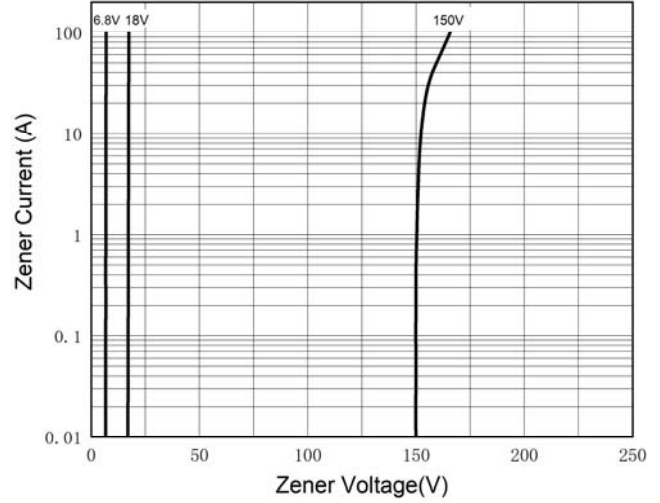


Fig.3 Pulse Waveform



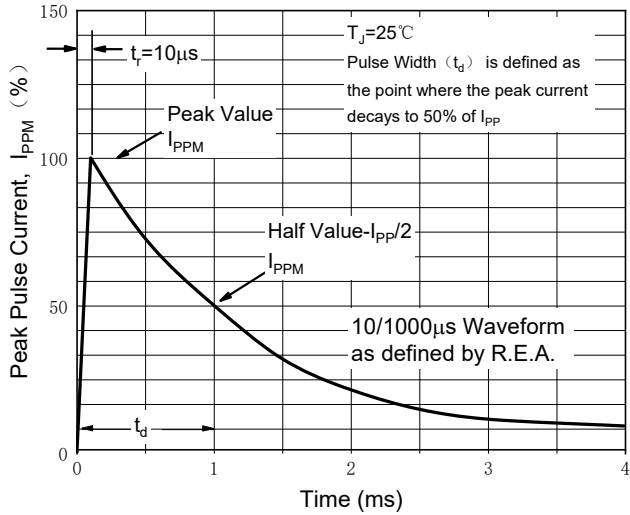


# SMAF3Z6.8AQ THRU SMAF3Z200AQ

## Ordering Information (Example)

PREFERRED P/N	PACKAGE CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
SMAF3Z6.8AQ ~SMAF3Z200AQ	F1	Approximate 0.034	3000	24000	96000	7" reel


## Marking Information

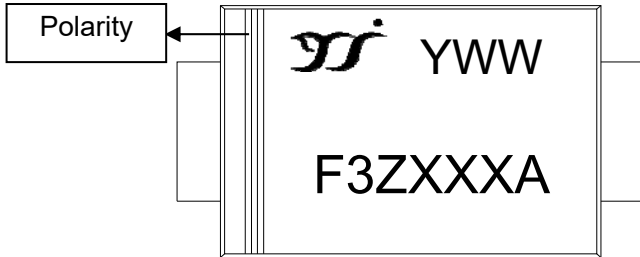

Note:


- All marking is at middle of the product body
- All marking is in laser printing
- XXX is marking code, like SMAF3Z6.8AQ marking code is F3Z6.8A
- Body color: Black
- YWW is date code, "Y" is year. "WW" is week.  
For instance:  
The 45<sup>th</sup> week of 2025, date code is 545

## Outline Dimensions

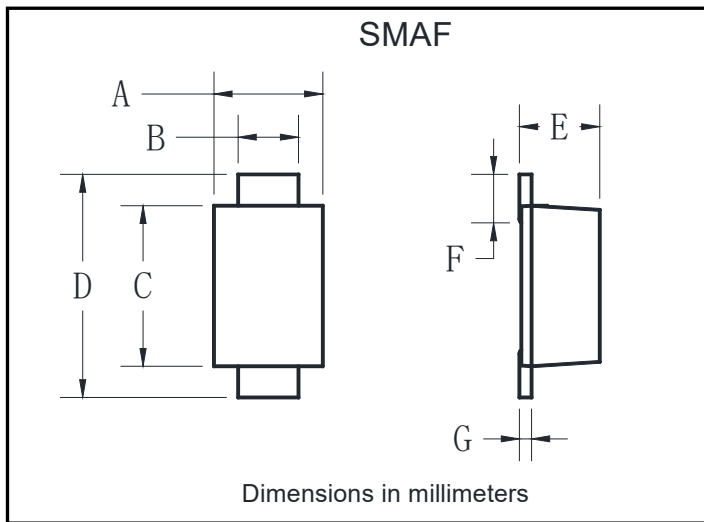

SMAF		
Dim	Min	Max
A	2.40	2.80
B	1.35	1.45
C	3.40	3.60
D	4.40	4.80
E	1.05	1.25
F	0.50	1.00
G	0.15	0.31

## Suggested pad layout

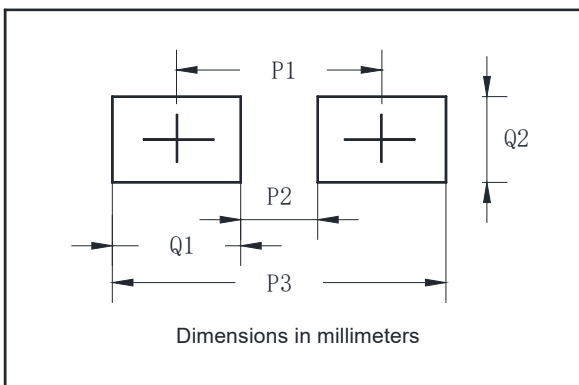

SMAF	
Dim	Millimeters
P1	6.50
P2	4.00
P3	1.50
Q1	2.50
Q2	1.70



## SMAF3Z6.8AQ THRU SMAF3Z200AQ

---

### Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, lifesaving, lifesustaining, or military, Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.