


Surface Mount Ultra Fast Recovery Rectifier

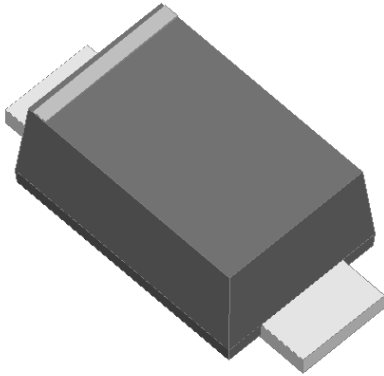


Features

- Low profile package
- Ideal for automated placement
- Glass passivated chip junction
- High forward surge capability
- Super Fast reverse recovery time
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C

Typical Applications

For use in high frequency rectification of power supplies, inverters, converters, and freewheeling diodes for consumer and telecommunication.



Mechanical Data

- **Package:** SOD-123FL
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, halogen-free
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** Cathode line denotes the cathode end

■ Maximum Ratings (T_a=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	U1A	U1B	U1C	U1D	U1F	U1G	U1H	U1J
Device marking code			U1A	U1B	U1C	U1D	U1F	U1G	U1H	U1J
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	V	50	100	150	200	300	400	500	600
Maximum RMS Voltage	V _{RMS}	V	35	70	105	140	210	280	350	420
Maximum DC blocking Voltage	V _{DC}	V	50	100	150	200	300	400	500	600
Average rectified output current @60Hz sine wave, Resistance load, TL (FIG.1)	I _O	A	1.0							
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave, 1 cycle, T _j =25°C	I _{FSM}	A	30							
Forward Surge Current (Non-repetitive) @1ms, square wave, 1 cycle, T _j =25°C			60							
Current squared time @1ms≤t≤8.3ms T _j =25°C	I ² t	A ² s	3.735							
Storage temperature	T _{stg}	°C	-55 ~ +150							
Junction temperature	T _j	°C	-55 ~ +150							



U1A THRU U1J

■Electrical Characteristics (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	U1A	U1B	U1C	U1D	U1F	U1G	U1H	U1J
Maximum instantaneous forward voltage	V _F	V	I _F M=1.0A	0.92			1.25		1.7		
Maximum reverse recovery time	t _{rr}	ns	I _F =0.5A, I _R =1.0A, I _{rr} =0.25A	25						35	
Maximum DC reverse current at rated DC blocking voltage	I _R	μA	T _j =25°C	5							
			T _j =125°C	50							
Typical junction capacitance	C _j	pF	Measured at 1MHz and Applied Reverse Voltage of 4.0 V.D.C	17			15		16		

■Dynamic Characteristics

◆ U1A THRU U1D

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS		Min	Typ	Max
Reverse Recovery Time	T _{RR}	ns	T _j =25°C	I _F =1A, di/dt=-50A/us V _{RM} =30V	-	27	-
			T _j =25°C	I _F =1A di/dt=-200A/us V _{RM} =100V	-	18	-
			T _j =125°C		-	24	-
Peak recovery current	I _{RRM}	A	T _j =25°C	I _F =1A di/dt=-200A/us V _{RM} =100V	-	2.4	-
			T _j =125°C		-	3.9	-
Reverse recovery charge	Q _{rr}	nC	T _j =25°C	I _F =1A di/dt=-200A/us V _{RM} =100V	-	21.6	-
			T _j =125°C		-	46.6	-
Non-repetitive avalanche energy	E _{AS}	mJ	T _j =25°C	I _R =1.5 A, L=15 mH	16.9	-	-

◆ U1F THRU U1G

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS		Min	Typ	Max
Reverse Recovery Time	T _{RR}	ns	T _j =25°C	I _F =1A, di/dt=-50A/us V _{RM} =30V	-	26	-
			T _j =25°C	I _F =1A di/dt=-200A/us V _{RM} =200V	-	22	-
			T _j =125°C		-	31	-
Peak recovery current	I _{RRM}	A	T _j =25°C	I _F =1A di/dt=-200A/us V _{RM} =200V	-	1.9	-
			T _j =125°C		-	3.5	-
Reverse recovery charge	Q _{rr}	nC	T _j =25°C	I _F =1A di/dt=-200A/us V _{RM} =200V	-	21.1	-
			T _j =125°C		-	54.9	-
Non-repetitive avalanche energy	E _{AS}	mJ	T _j =25°C	I _R =0.4A, L=15 mH	1.2	-	-



U1A THRU U1J

◆ U1H THRU U1J

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS		Min	Typ	Max
Reverse Recovery Time	T_{RR}	ns	$T_j=25^\circ\text{C}$	$I_F=1\text{A}$, $di/dt=-50\text{A}/\mu\text{s}$ $V_{RM}=30\text{V}$	-	38	-
			$T_j=25^\circ\text{C}$	$I_F=1\text{A}$ $di/dt=-200\text{A}/\mu\text{s}$ $V_{RM}=400\text{V}$	-	32	-
			$T_j=125^\circ\text{C}$		-	52	-
Peak recovery current	I_{RRM}	A	$T_j=25^\circ\text{C}$	$I_F=1\text{A}$ $di/dt=-200\text{A}/\mu\text{s}$ $V_{RM}=400\text{V}$	-	2.9	-
			$T_j=125^\circ\text{C}$		-	4.7	-
Reverse recovery charge	Q_{rr}	nC	$T_j=25^\circ\text{C}$	$I_F=1\text{A}$ $di/dt=-200\text{A}/\mu\text{s}$ $V_{RM}=400\text{V}$	-	45.8	-
			$T_j=125^\circ\text{C}$		-	121.9	-
Non-repetitive avalanche energy	E_{AS}	mJ	$T_j=25^\circ\text{C}$	$I_R=0.3\text{A}$, $L=15\text{mH}$	0.7	-	-

■ Thermal Characteristics ($T_a=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	U1A	U1B	U1C	U1D	U1F	U1G	U1H	U1J
Typical Thermal resistance	$R_{\theta J-A}^{(1)}$	$^\circ\text{C}/\text{W}$	65							
	$R_{\theta J-L}^{(1)}$		25							
	$R_{\theta J-C}^{(1)}$		20							

Note:

(1) Thermal resistance between junction and ambient and between junction and lead mounted on P.C.B with 3mm*3mm copper pad areas.

■ Characteristics (Typical)

FIG.1: I_o -TL Cure


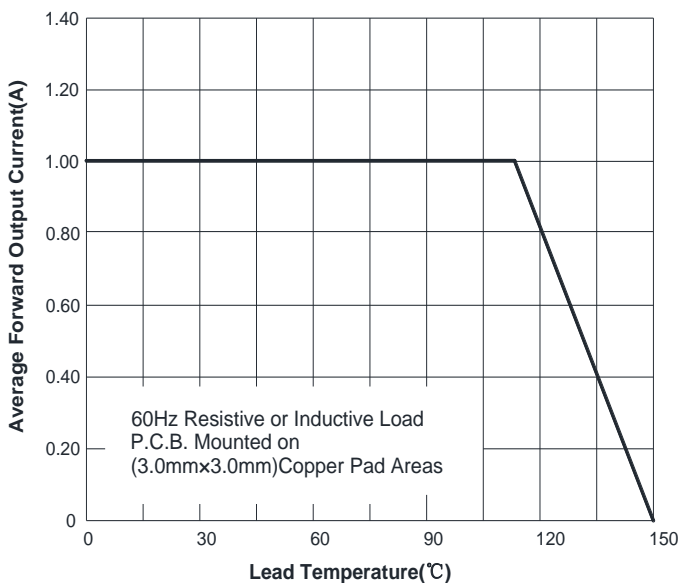


FIG.2: Forward Surge Current Capability



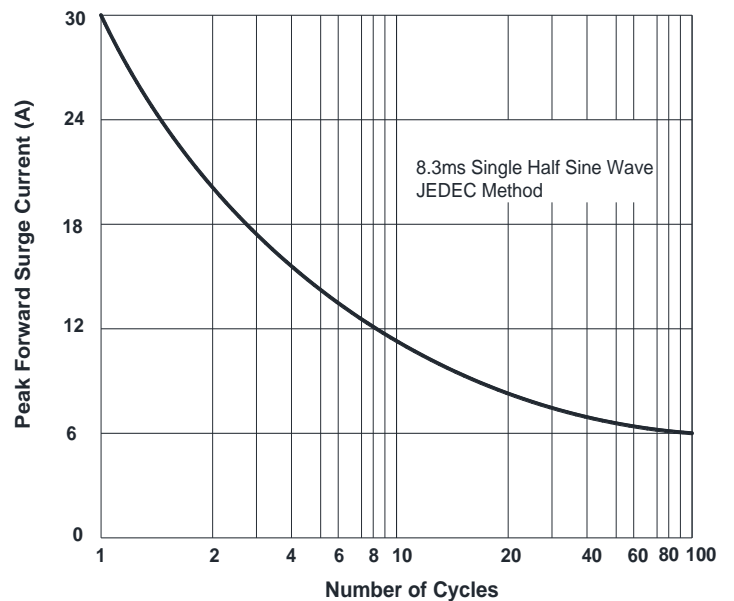

U1A THRU U1J

FIG.3: Typical Forward Characteristics

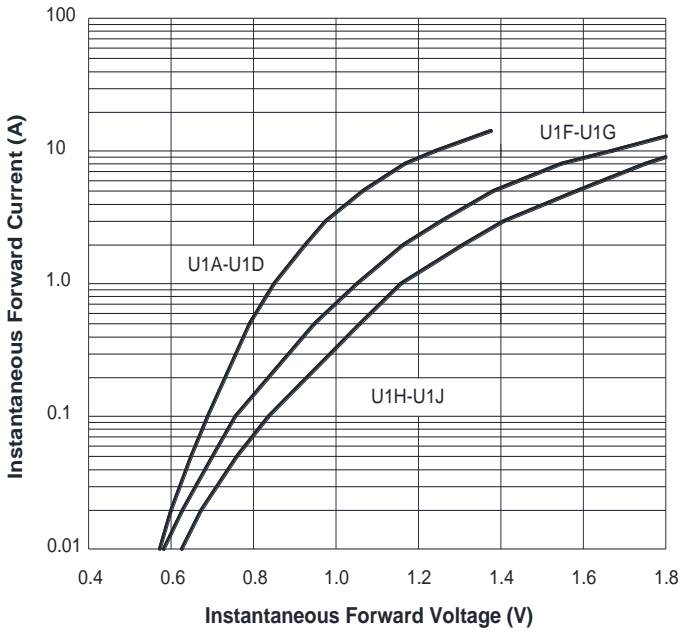


FIG.4: Typical Reverse Characteristics


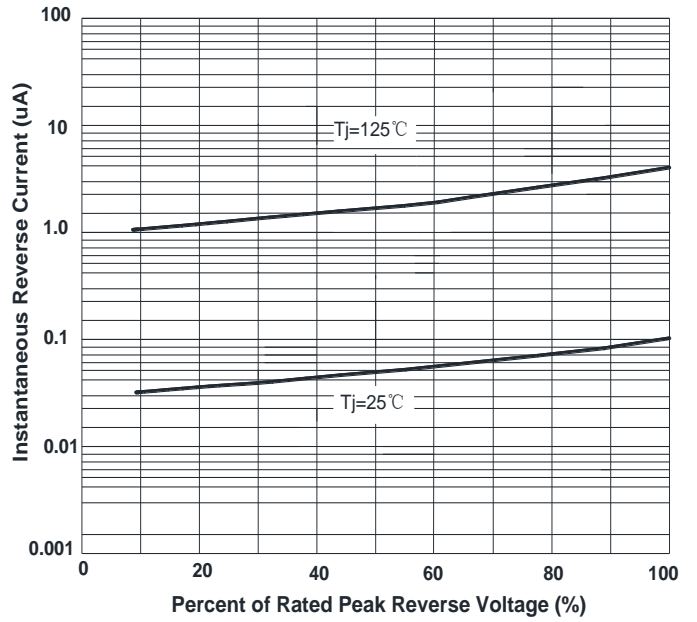


FIG.5: Diagram of circuit and Testing wave form of reverse recovery time




Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
U1A THRU U1J	F1	Approximate 0.0169	3000	30000	120000	7" reel
U1A THRU U1J	F2	Approximate 0.0169	2500	25000	100000	7" reel
U1A THRU U1J	F3	Approximate 0.0169	10000	/	210000	13" reel
U1A THRU U1J	F4	Approximate 0.0169	3000	54000	108000	7" reel
U1A THRU U1J	F5	Approximate 0.0169	10000	/	160000	13" reel
U1A THRU U1J	F6	Approximate 0.0169	3000	12000	60000	7" reel

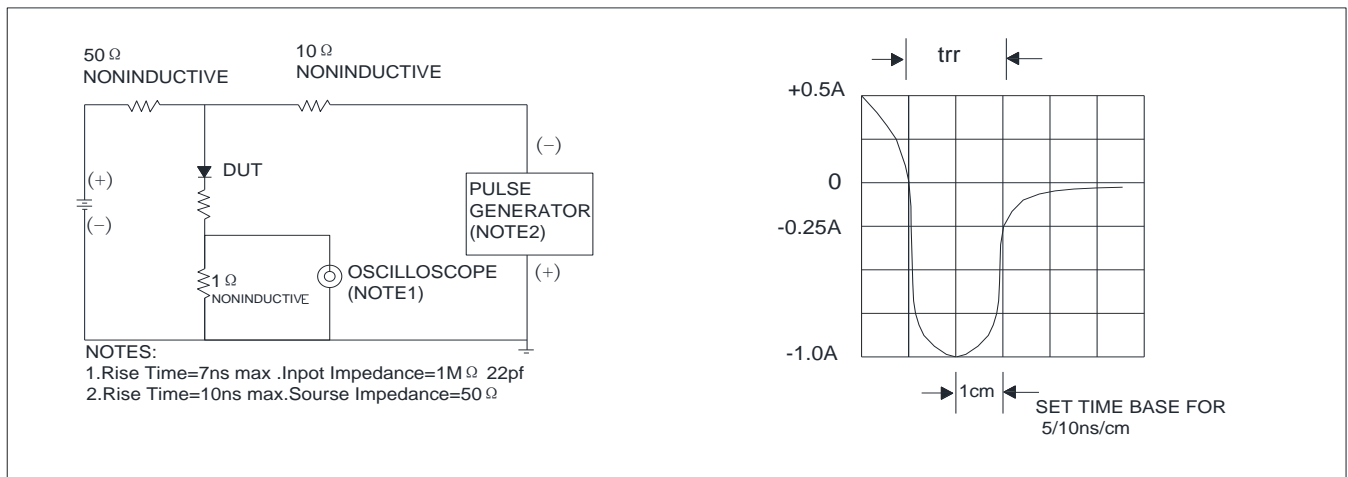


U1A THRU U1J

■ Outline Dimensions

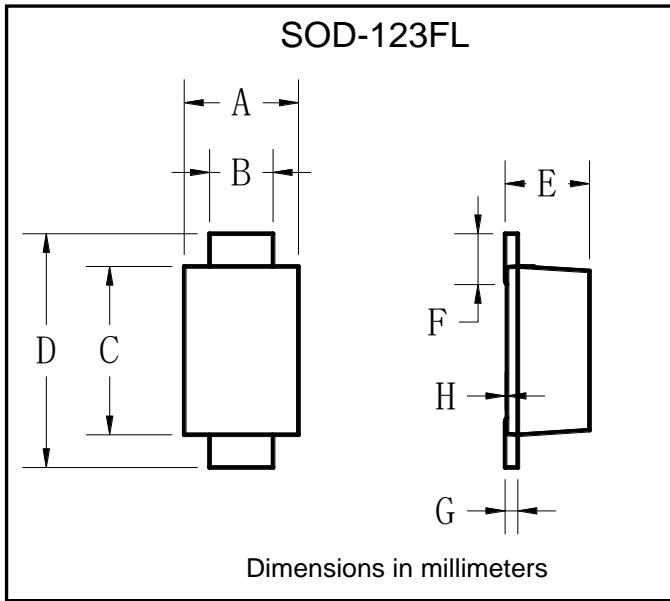

SOD-123FL		
Dim	Min	Max
A	1.60	1.90
B	0.90	1.10
C	2.55	2.85
D	3.60	3.90
E	1.00	1.20
F	0.40	0.90
G	0.10	0.25
H	0.00	0.05

■ Suggested pad layout

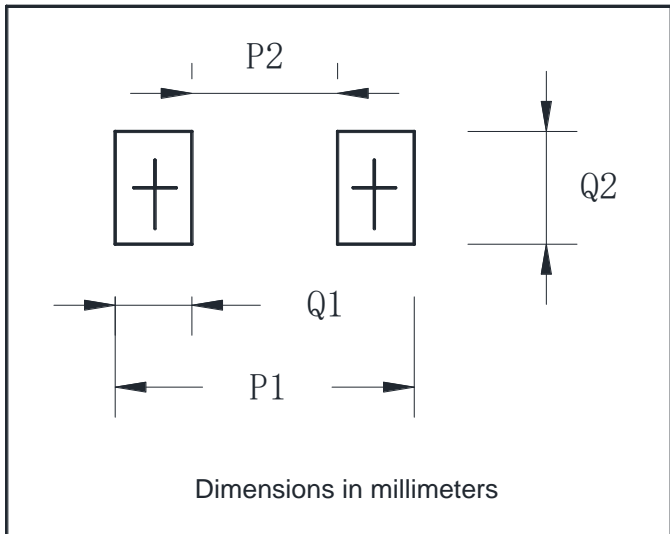

SOD-123FL	
Dim	Millimeters
P1	3.90
P2	1.90
Q1	1.00
Q2	1.50



U1A THRU U1J

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.